


● Track Shoes

Steel Qualities

Arcelor produces grades covered by the customer specifications.


Single Grouser



Designation	Weight	Dimensions		
	kg/m	A mm	B mm	E mm
IS 20/1	29,4	222	55,5	13,5
IS 36	31,6	236	57,5	13,3
IS 37	37,4	245	71,5	14,7
IS 30/1	47,9	247,6	71,4	16,8
TS1-31	30,566	232,5	65	12
TS1-32A	31,1	236,5	58,7	13,3
TS1-32	32,2	236,5	58,7	13,8
TS1-38	38,2	245	71,5	14,7
TS1-53	53,9	242,5	84	19
TS1-56 A	50,9	260	77,5	16,5
TS1-56	55,88	260	77,5	19
TS1-56 L	56,33	264	77,5	19
TS1-71	71,05	301	87,5	20,5
TS1-73	73,51	305	93	20,5




Double Grouser

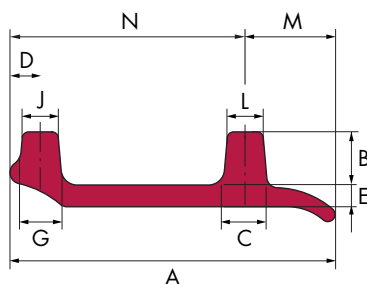

Designation	Weight	Dimensions		
	kg/m	A mm	B mm	E mm
IS 8	27,5	202	31	13
IS 11	36,5	232	34,5	14,5
IS 29/4	46,4	249,5	37	16,5
MR 30 B	46,3	246,6	38,1	16,5
TS2-49	48,52	250	49,5	15
TS2-73	73,7	306	50	20,5
TS2-73 B	80,78	306	50	23,5
TS2-104	104,116	330	50	35



Triple Grouser

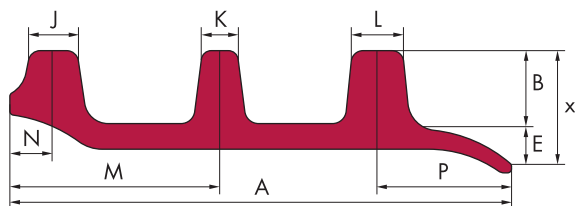

Designation	Weight	Dimensions		
	kg/m	A mm	B mm	E mm
IS 17+	23,3	199	25	8,5
IS 24/2	32,6	217,5	26	12
IS 32/3	27,5	199	25	11
IS 35	25,6	199	25	9,5
IS 41/2+	28,3	217,5	26	10
IS 49	35,9	232,5	31	11
IS 58+	26,6	219	26	8,5
IS 59	33,7	232,5	26	11
IS 69	39,4	232,5	31	13
TS3-27	27,8	219	30	8,5
TS3-27B	30,3	219	30	10
TS3-27C	32,08	219	30	11
TS3-28AA	26,5	217,5	26	8,5
TS3-28A	27,2	217,5	26	9
TS3-28	28,87	217,5	26	10
MR 0	29,5	203	25,3	12,7
MR 2 A	28,02	203	25,3	11,5
MR 2	30	203	25,3	12,7
TS3-32	32,64	222,5	28	12,5
TS3-38	38,927	240	26,5	13
TS3-38b	42,55	240	26,5	15
TS3-40	40,278	247	36	11
TS3-40B	44,12	247	36	13
TS3-45	45,483	254,5	37	13
TS3-48	48,016	253	30,5	16,5
TS3-51	51,1	254,5	37	16
TS3-55	55,476	254,5	37	18
TS3-60	60,468	254,5	37	20,5
MR 6	69,8	266	30	30

+ Please consult our technical assistants.